



**(43) International Publication Date**  
**6 May 2005 (06.05.2005)**

PCT

**(10) International Publication Number**  
**WO 2005/040027 A1**

**(51) International Patent Classification<sup>7</sup>: B66B 5/02**

(21) International Application Number: PCT/EP2003/011093

**(22) International Filing Date:** 7 October 2003 (07.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): OTIS ELEVATOR COMPANY [US/US]; Ten Farm Springs Road, Farmington, CT 06032 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): TEGTMEIER, Dirk, Heinrich [DE/DE]; Heiligenseestrasse 68B, 13503 Berlin (DE). WITTJEN, Kristian, Bernhard [DE/DE]; Weisswasserweg 3a, 12205 Berlin (DE).

(74) Agent: KLUNKER, SCHMITT-NILSON, HIRSCH;  
Winzererstr. 106, 80797 München (DE).

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

[Continued on next page]

(54) Title: ELECTRICAL ELEVATOR RESCUE SYSTEM

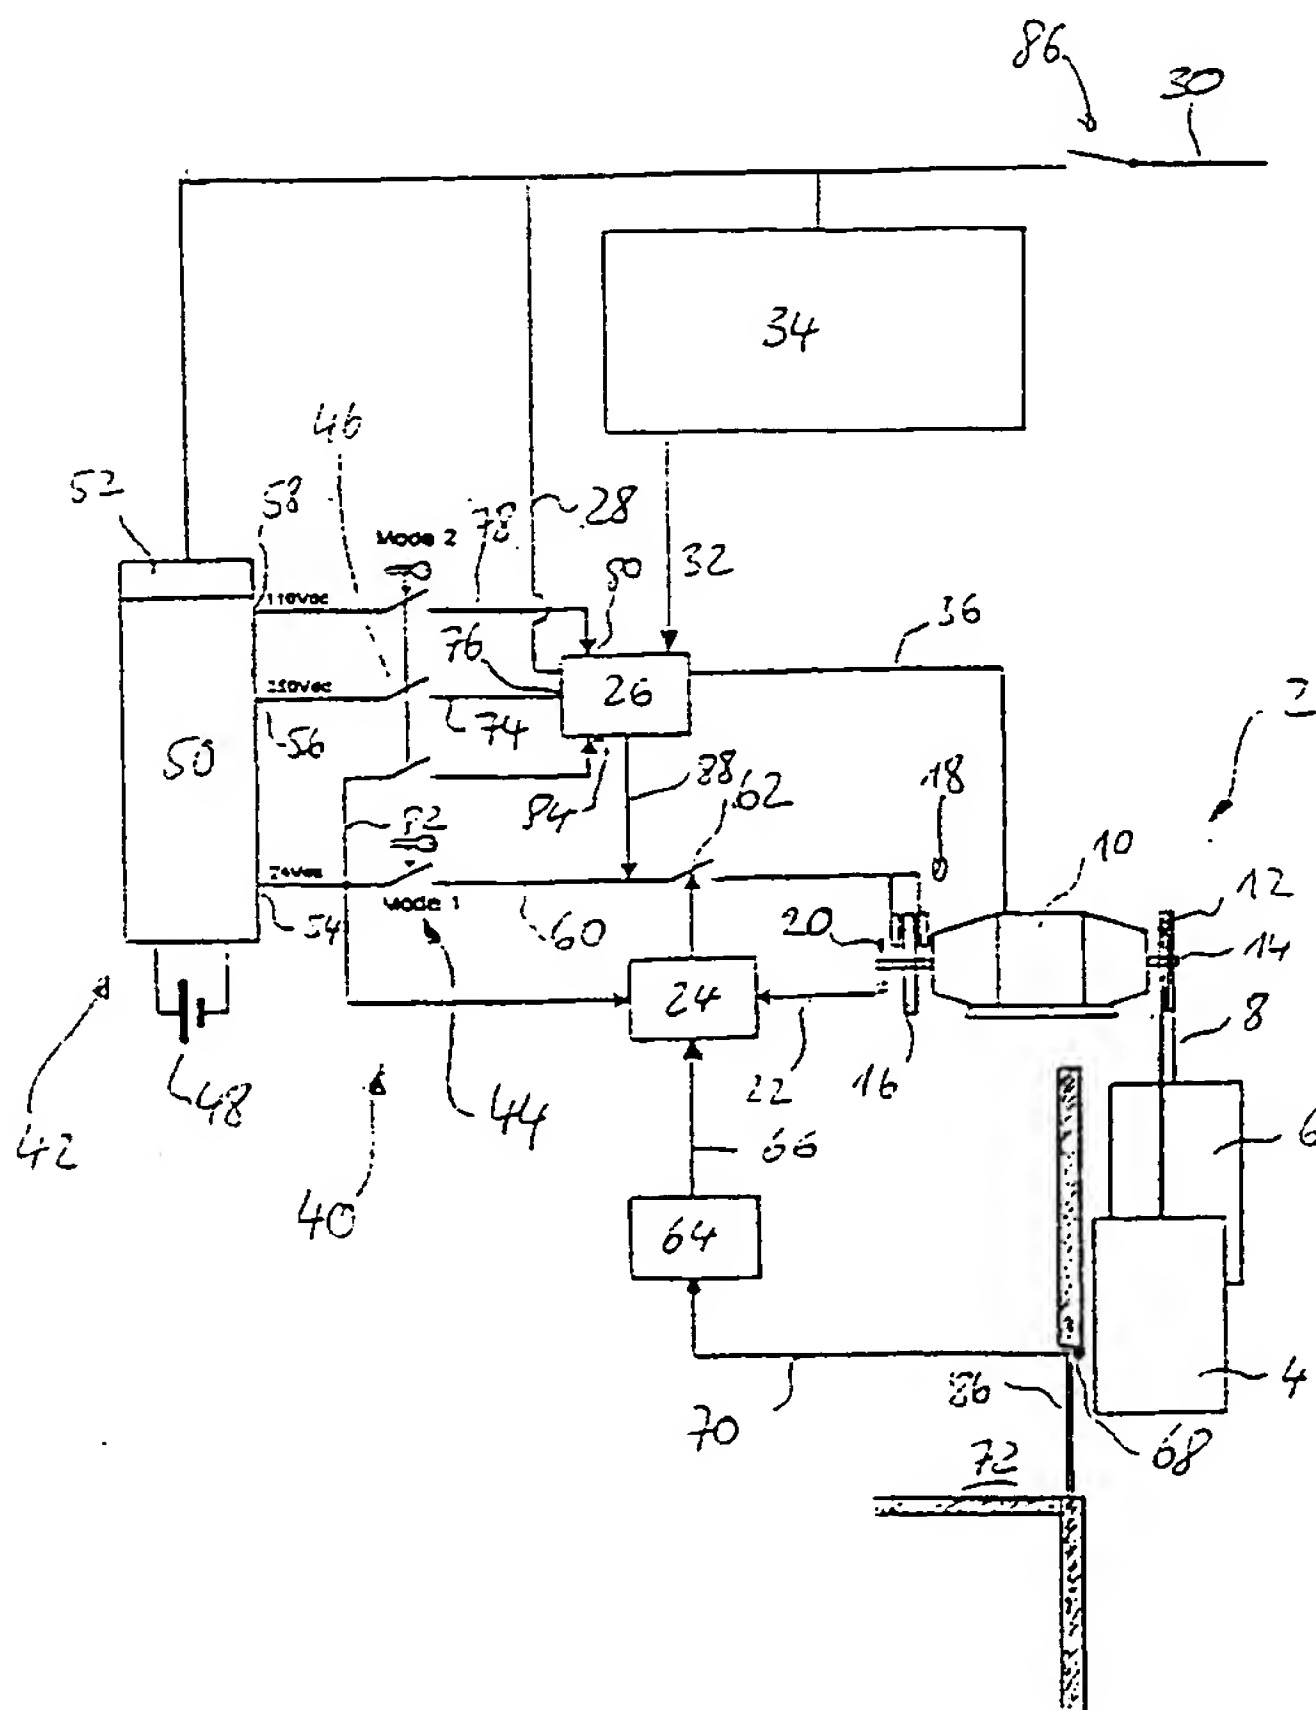

**(57) Abstract:** Elevator (2) comprising a car (4), a counterweight (6), a hoisting rope (8) for suspending the car (4) and the counterweight (6), a drive motor (10), a motor drive unit (26) for supplying the power to the drive motor (10), and a brake (18) for stopping the movement of the car (4) in an emergency situation, the elevator (2) further comprising an elevator rescue system (40), comprising an emergency power supply (42), an emergency brake switch (44) for connecting and disconnecting the power of the emergency power supply (42) to the brake (18), and an emergency drive switch (46) for connecting and disconnecting the power of the emergency power supply (42) to the drive motor (10), characterised in that the elevator rescue system (40) further comprises the motor drive unit (26) and a power line (74) connecting the emergency power supply (42) with the motor drive unit (26) and including the emergency drive switch (46).



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*